

Test Report

Report No. : HA0122NB051696EM
Applicant : Ningbo Zhongdi Industry & Trade Co., Ltd.
Address : Jishigang Industry Zone, Haishu District, Ningbo 315171, P. R. China
Trade Mark(s) : N/A
Manufacturer : Ningbo Zhongdi Industry & Trade Co., Ltd.
Address : Jishigang Industry Zone, Haishu District, Ningbo 315171, P. R. China
Manufacturing site : Ningbo Zhongdi Industry & Trade Co., Ltd.
Address : Jishigang Industry Zone, Haishu District, Ningbo 315171, P. R. China

Equipment Under Test (EUT):

EUT Name : Bench Fan
Model/Type No. : ZD-159, ZD-153, ZD-153A
Standards : Refer to page 2
Date of Receipt : May 10, 2022
Date of Test : May 11, 2022 to June 14, 2022
Date of Issue : June 15, 2022
Test Result : **PASS***

Prepared By:

Ningbo HATEK Co., Ltd.

6F, No. 65, Mujin Road, National Hi-Tech Zone, Ningbo, Zhejiang 315013, China

Tel: +86-574-87171888 E-mail: info@hatek.com.cn

Prepared By


Bill Dong

Engineer



Received By

Milser

Technical Manager

*The test results have been reviewed against the Directives above and found to meet their essential requirement. The results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior written approval of HATEK.

1 Test Summary

1.1 Test Items

Test Items	Result
Disturbance Voltage on Mains Terminal 0.15MHz- 30MHz	P
Discontinuous Disturbance Voltage/Click	N/A
Continuous Disturbance Power, 30MHz - 300MHz	N/A
Radiation Emission, 30MHz - 1000MHz	P
Harmonic Current	P
Voltage Fluctuations-Flicker	P
ESD	P
Radiated Immunity (80MHz - 1GHz)	P
Electrical Fast Transients (EFT)	P
Surge Immunity	P
Injected Currents, 0.15MHz - 230MHz	P
Voltage Dips and Interruptions	P
Remark:	P: Pass/ F: Fail/ N/A: Not Applicable

1.2 Test Specification

The equipment(s) comply with the requirements according to the following standards:

EN IEC 55014-1:2021 : Electromagnetic compatibility-Requirements for household appliances, electric tools and similar apparatus Part1: Emission;

EN IEC 55014-2:2021 : Electromagnetic compatibility-Requirements for household appliances, electric tools and similar apparatus Part2: Immunity;

EN IEC 61000-3-2:2019+A1: Electromagnetic compatibility (EMC) - Part 3-2: Limits - Limits for harmonic current emissions (equipment input current ≤ 16 A per phase);

EN 61000-3-3:2013+A1+A2: Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection.

Contents

Page

1	TEST SUMMARY	2
1.1	TEST ITEMS	2
1.2	TEST SPECIFICATION	2
2	GENERAL INFORMATION	4
2.1	CLIENT INFORMATION	4
2.2	GENERAL DESCRIPTION OF E.U.T	4
2.3	IDENTIFIES AND DIFFERENCES:	4
2.4	ENVIRONMENT	4
2.5	SUBMITTED DOCUMENTS	4
3	TEST FACILITY AND INSTRUMENT LIST	5
3.1	TEST FACILITY	5
3.2	INSTRUMENT LIST	5
3.3	MEASUREMENT UNCERTAINTY	5
4	TEST RESULTS EMISSION	6
4.1	EMISSION IN THE FREQUENCY RANGE FROM 0 KHZ TO 30 MHZ	6
4.1.1	<i>Harmonics on AC Mains</i>	6
4.1.2	<i>Voltage changes, voltage fluctuations and flicker on AC mains</i>	7
4.1.3	<i>Mains Terminal Continuous Disturbance Voltage</i>	8
4.2	EMISSION IN THE FREQUENCY RANGE FROM 30 MHZ TO 1000 MHZ	12
4.2.1	<i>Disturbance Power on Mains</i>	12
5	TEST RESULTS IMMUNITY	14
5.1	ENCLOSURE	15
5.1.1	<i>Electrostatic Discharge</i>	15
5.1.2	<i>Radio Frequency Electromagnetic Field</i>	16
5.2	INPUT AND OUTPUT AC POWER PORTS	17
5.2.1	<i>Fast Transients on AC Power Lines</i>	17
5.2.2	<i>Injected Current into AC Power Port</i>	18
5.2.3	<i>Surges to AC Power Port</i>	19
5.2.4	<i>Voltage dips and interruptions to AC Power Port</i>	20
6	PHOTOGRAPHS OF THE EUT	21
7	LIST OF TABLES	26
8	LIST OF FIGURES	26
9	LIST OF PHOTOGRAPHS	26

2 General Information

2.1 Client Information

Applicant : Ningbo Zhongdi Industry & Trade Co., Ltd.

Address : Jishigang Industry Zone, Haishu District, Ningbo 315171, P. R. China

2.2 General Description of E.U.T.

Ratings : 220-240V~, 50Hz, 23W

Protection class : Class II

2.3 Identifies and differences:

The appliances covered in this report are considered as Bench Fan, for household and indoor use only.

Models ZD-159, ZD-153, ZD-153A are all same except decorative pieces. Therefore, we test ZD-159 and the worst test data is listed in the report as representative.

2.4 Environment

- ☒ Residential (domestic) environment
- ☒ Commercial and light-industrial environment
- ☐ Industrial environment
- ☐ Medical environment.

2.5 Submitted Documents

Constructional Data Form for EMC

Circuit diagram, user's manual, labels and construction drawings etc.

3 Test Facility and Instrument list

3.1 Test Facility

All the tests done in this report are subcontracted to Shenzhen Most Technology Service Co., Ltd. (No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park, Nanshan, Shenzhen, Guangdong, China)

3.2 Instrument list

Table 1: List of Test and Measurement Equipment of Laboratory

No.	Equipment	Model	Inventory no.	Cal. due date
1.	Artificial mains network	ENV216	101022	2023-05-25
2.	EMI test receiver	ESCI	100708	2023-05-25
3.	Absorbing clamp	ADS-Z21	100309	2023-05-25
4.	Harmonics/flicker analyzer	DPA503	V0828104013	2023-05-25
5.	Harmonics/flicker analyzer	DPA500	V0746103124	2023-05-25
6.	ESD generator	DITO	B07040	2023-05-25
7.	Dip Surge Burst Test System	UCS500-M6B	V0746103125	2023-05-25
8.	CDN	FCC-801-M2/M3-16A	7079	2023-05-25
9.	6 dB Attenuator	75-A-FFN-06	141733	2023-05-25
10.	Integrated measurement system	IMS	100012	2023-05-25
11.	EMI test receiver	ESU26	100224	2023-05-25
12.	Artificial mains network	ESH2-Z5	100198	2023-05-25
13.	Trilog broadband antenna(RE)	VULB 9163	9163-560	2023-05-25
14.	Combined Antenna	HL562	100335	2023-05-25
15.	Power Amplifier	250W1000 A	0327579	2023-05-25
16.	Log-periodic Antenna	AT1080	0325189	2023-05-25

3.3 Measurement Uncertainty

Conducted Emission Expanded Uncertainty : U = 3.18 dB

Radiated Magnetic Field emission : U = 2.04 dB

Radiated Emission Expanded Uncertainty : U = 3.50 dB

4 Test Results EMISSION

4.1 Emission in the Frequency Range from 0 kHz to 30 MHz

4.1.1 Harmonics on AC Mains

General test information

Temperature	: 25°C
Relative Humidity	: 51 %RH
Test procedure	: EN IEC 61000-3-2:2019+A1
Test duration	: 2.5min
Harmonic order	: 2 – 40 th
Frequency range	: 0 – 2kHz
Test result	: Pass

Block Diagram of Test Set up



Test Procedure

The harmonics on AC Mains in the frequency from 0 to 2 kHz were measured in accordance with EN IEC 61000-3-2:2019+A1.

The measurement of Harmonics of the fundamental current were measured up to 40 order harmonics using a digital power meter with an analogue output and frequency analyser which was integrated in the harmonic & flicker test system. This equipment is in compliance with the requirements of EN IEC 61000-3-2:2019+A1.

The results indicated in the following tables and figures were those measured and recorded by an automatic measuring system.

Test Results:

According to the Clause 7 in the EN IEC 61000-3-2:2019+A1

For the following categories of equipment, limits are not specified in this standard:

– equipment with a rated power of 75 W or less, other than lighting equipment;


This product is not defined as lighting equipment, and has rated power less than 75W, therefore, no limit apply according to EN 61000-3-2.

4.1.2 Voltage changes, voltage fluctuations and flicker on AC mains

General test information

Test procedure	:	EN 61000-3-3:2013+A1+A2
Temperature	:	25°C
Relative Humidity	:	51 %RH
Test result	:	Pass

Block Diagram of Test Set up

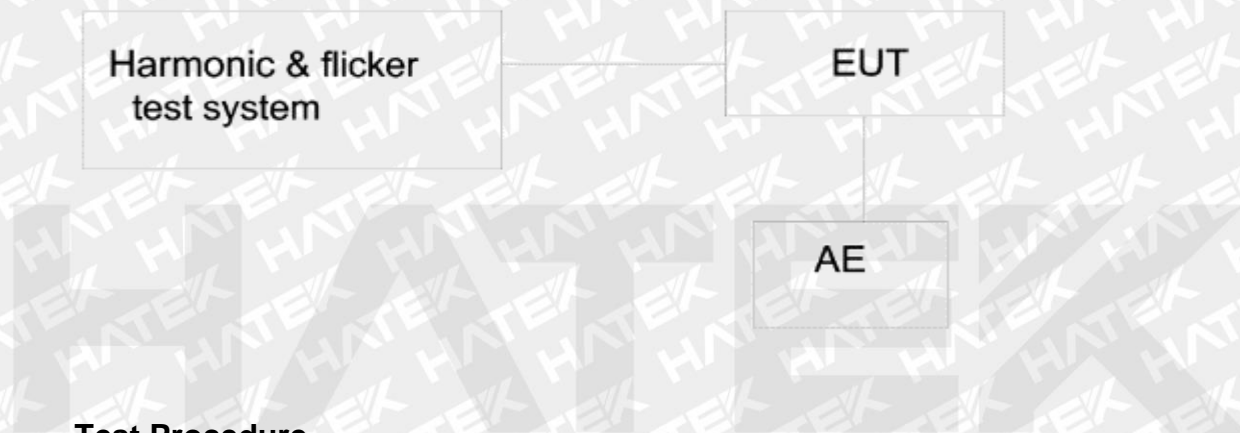

Test Procedure

According to the A.10 of the EN 61000-3-3:2013+A1+A2:

“For hand-held hairdryers, P_{It} shall not be evaluated.”

According to the characteristics of the sample, as specified by clause 5 of the basic standard, following limits apply:

- the value of P_{St} shall not be greater than 1.0;
- the value of P_{It} shall not be greater than 0.65;
- the value of $d(t)$ during a voltage change shall not exceed 3.3% for more than 500ms;
- the relative steady-state voltage change, d_c , shall not exceed 3.3%;
- the maximum relative voltage change d_{max} , shall not exceed 7%.

The measurement was carried in accordance with Annex B of the basic standard and the EUT was set to produce the most unfavorable sequence of voltage changes.

Following are the measurement results obtained via an automatic testing system.

Table 2: Voltage fluctuations and flicker measurement results


	d_c	$d_{max}(\text{average})$	$d(t)$	P_{St}	P_{It}
Limits	3.3%	7%	3.3%/500ms	1.0	N/A
Result	0.002%	0.006%	0.00ms	0.001	-

4.1.3 Mains Terminal Continuous Disturbance Voltage

General test information

Test procedure	: EN IEC 55014-1:2021 and CISPR 16-1 series standards
Frequency range	: 0.15-30MHz
Kind of test site	: EMC Chamber
Temperature	: 25 °C
Relative Humidity	: 51 %RH
Operational condition	: ON
Artificial hand	: No
Earthing	: No
Test result	: Pass

Block Diagram of Test Set up

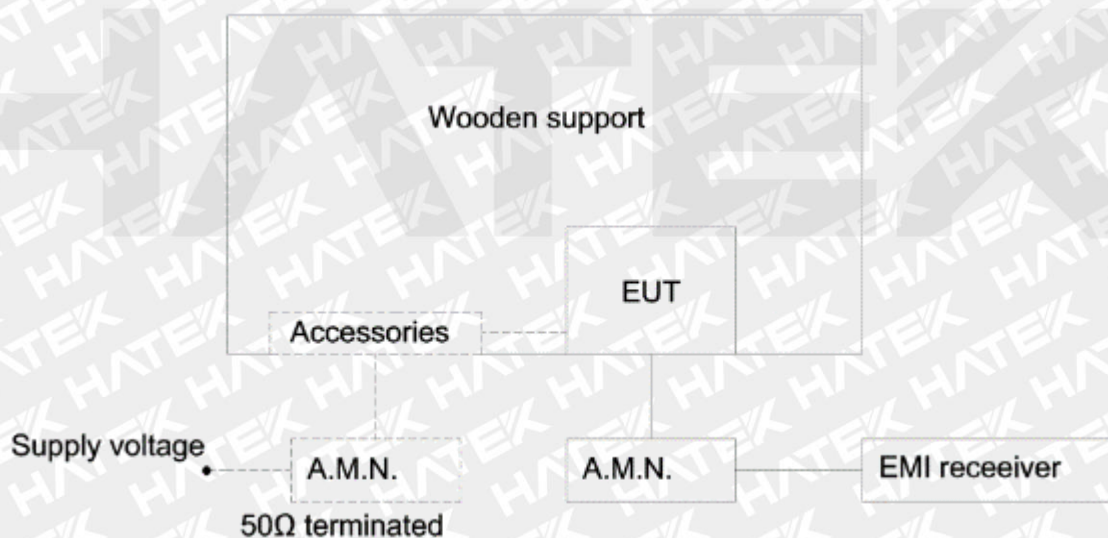

- ☒ For table top equipment, wooden support is 0.8m height.
- ☐ For floor standing equipment, wooden support is 0.1m height.

Test Procedure

The measurement setup was made according to EN IEC 55014-1:2021 in an EMC Chamber.

Prior to the measurements the test object operated about 15 minutes (warm-up) in order to stabilize its operating conditions and to ensure reliable measurement values.


Furthermore an internal calibration with the test receiver was conducted prior to each measurement. And the measurement was made in the state the maximum disturbance was obtained.

The tested object was set-up on a wooden table. The length of the power cord of the tested object was about 1.5m. The EUT was set 0.8m away from the AMN. The cord longer than necessary to be connected to the AMN was folded forth and back parallel so as to form a bundle with a length between 0.3m and 0.4m. The EUT (Equipment under Test) was wrapped with artificial hand that was earthed through the Artificial Mains Network (AMN).

The Interference Voltage was determined according to clause 5 of EN IEC 55014-1:2021 while measuring the line and neutral conductor by turns.

In the Figures, the symbol “*” means Quasi-Peak Value and the symbol “◆” means Average Value which was measured in final measurement.


Figure 1: Test Curve of Conducted Emission in the frequency range of 150kHz - 30MHz, L line

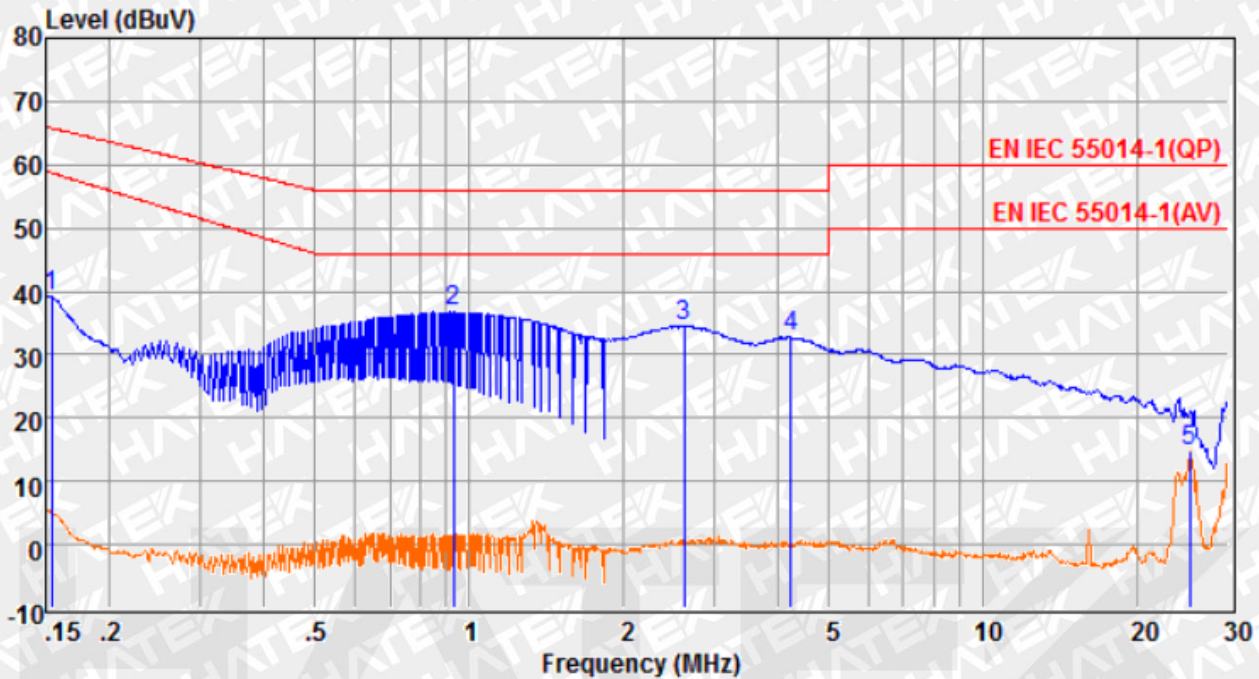

	Freq	Reading	LisnFac	CabLos	Measured	Limit	Over	Remark
	MHz	dBpW	dB	dB	dBpW	dBpW	dB	
1	0.15	29.50	9.71	0.00	39.21	65.78	-26.57	Peak
2	0.93	26.89	9.88	0.00	36.77	56.00	-19.23	Peak
3	2.62	24.66	9.92	0.00	34.58	56.00	-21.42	Peak
4	4.22	22.78	9.94	0.00	32.72	56.00	-23.28	Peak
5	25.19	4.95	9.72	0.00	14.67	50.00	-35.33	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss.
 2. The emission levels that are 20dB below the official limit are not reported.

Figure 2: Test Curve of Conducted Emission in the frequency range of 150kHz - 30MHz, N line

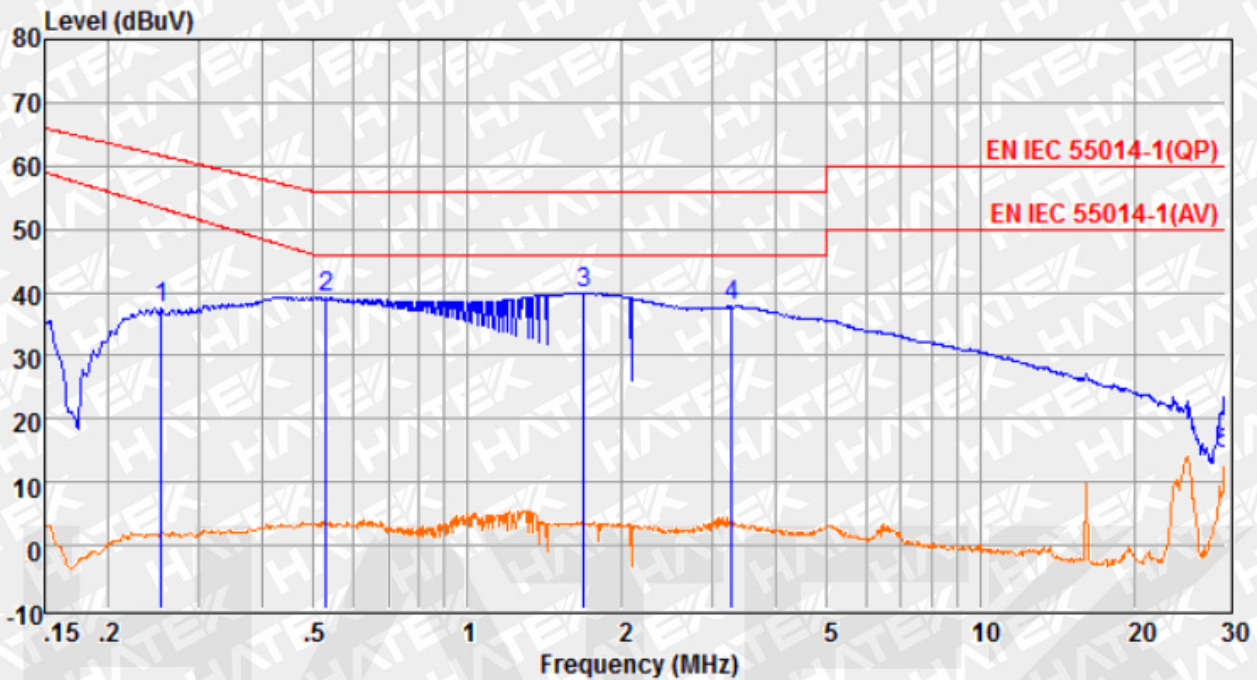

	Freq	Reading	LisnFac	CabLos	Measured	Limit	Over	Remark
	MHz	dBpW	dB	dB	dBpW	dBpW	dB	
1	0.25	27.70	9.78	0.00	37.48	61.64	-24.16	Peak
2	0.53	29.36	9.81	0.00	39.17	56.00	-16.83	Peak
3	1.69	29.97	9.88	0.00	39.85	56.00	-16.15	Peak
4	3.28	27.87	9.92	0.00	37.79	56.00	-18.21	Peak
5	30.00	4.67	9.65	0.00	14.32	50.00	-35.68	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss.
 2. The emission levels that are 20dB below the official limit are not reported.


4.2 Emission in the Frequency Range from 30 MHz to 1000 MHz

4.2.1 Disturbance Power on Mains

General test information

Frequency Range	: 30 – 300MHz
Kind of test site	: EMC Chamber
Temperature	: 25°C
Relative Humidity	: 51 %RH
Operational condition	: ON
Port	: Mains
Limit	: EN IEC 55014-1:2021, clause 4.1.2.1, Household and similar appliances
Test result	: Pass

Block Diagram of Test Set up

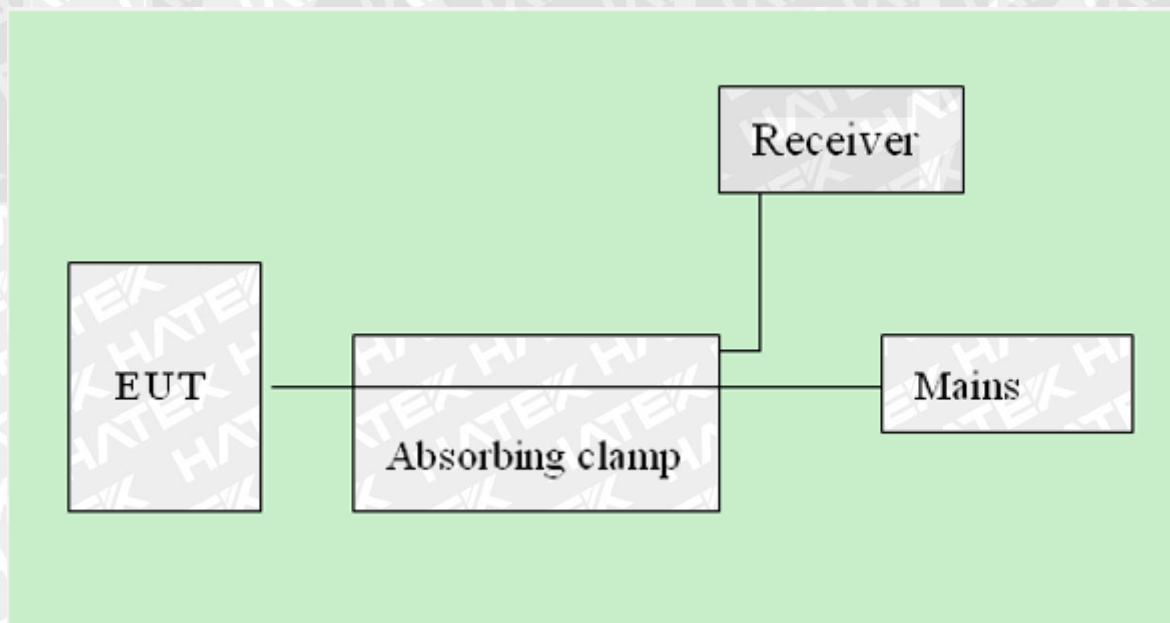

- ☒ For table top equipment, wooden support is 0.8m height.
- ☐ For floor standing equipment, wooden support is 0.1m height.


Test Procedure

Furthermore an internal calibration with the test receiver was conducted prior to each measurement.

The tested object was set-up on a wooden bench. The length of the power cord of the test object was about 1.5m. The length of power cord of EUT plus that of the extension cord was approximately 6.0m.

In the Figures, the symbol “+” means Quasi-Peak Value and the symbol “x” means Average Value which was measured in final measurement.

Figure 3: Test Curve of Power Disturbance in the frequency range of 30–300MHz

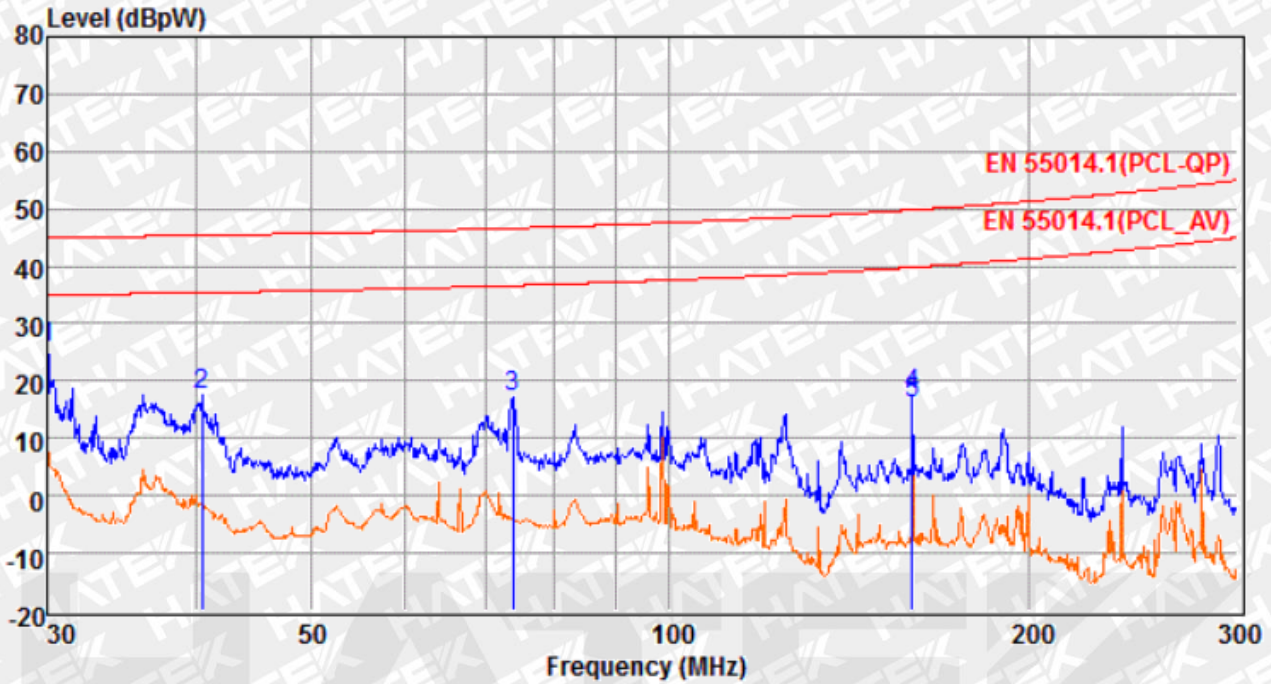

	Freq	Reading	LisnFac	CabLos	Measured	Limit	Over	Remark
	MHz	dBpW	dB	dB	dBpW	dBpW	dB	
1	30.00	2.63	3.10	20.10	25.83	45.01	-19.18	Peak
2	40.47	-2.73	1.68	18.68	17.63	45.40	-27.77	Peak
3	73.81	-6.69	3.35	20.35	17.01	46.63	-29.62	Peak
4	160.00	-1.82	1.10	18.10	17.38	49.83	-32.45	Peak
5	160.00	-3.27	1.10	18.10	15.93	39.83	-23.90	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss.
 2. The emission levels that are 20dB below the official limit are not reported.

5 Test Results I M M U N I T Y

Performance criterion:

Performance criterion A: The apparatus shall continue to operate as intended during the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended.

Performance criterion B: The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended. During the test, degradation of performance is allowed.

Performance criterion C: Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls, or by any operation specified in the instructions for use.

Room temperature : 24-26 °C
Relative Humidity : 45-58%


Conclusion: Pass

5.1 Enclosure

5.1.1 Electrostatic Discharge

Charge voltage : $\pm 4.0\text{kV}$ (Conducted Discharge)
 $\pm 8.0\text{kV}$ (Air Discharge)
 Polarity : positive / negative
 Number of discharges : >10
 Performance criteria : B

Block Diagram of Test Set up

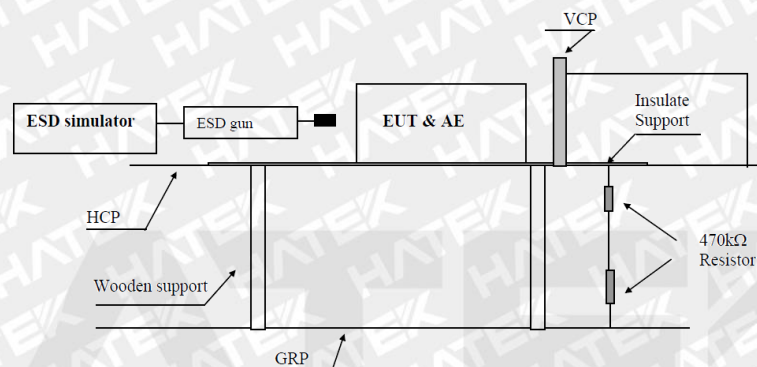

- ☒ For table top equipment, wooden support is 0.8m height.
- ☐ For floor standing equipment, wooden support is 0.1m height.

Test Procedure

The immunity against electrostatic discharge was tested in accordance with EN IEC 55014-2:2021. Test setup and ESD-Generator are according to EN 61000-4-2 which is specified by EN IEC 55014-2:2021.

The EUT is placed on 0,8m wood table above the ground plane. And the minimum distance between the EUT and all other conductive structures except the ground plane beneath the EUT is more than 0,5m. The reference ground plane is an aluminium sheet of 0,25mm minimum thickness. The reference ground plane is connected to the protective earth. The size of the ground plane is $2\text{m} \times 2\text{m}$.

A horizontal coupling plane (HCP), $1,6\text{m} \times 0,8\text{m}$, is placed on the table and isolated from the EUT and cables by an insulating support 0,5mm thick. Vertical coupling plane (VCP) of dimensions $0,5\text{m} \times 0,5\text{m}$ is placed parallel to and positioned at a distance of 0,1m from the EUT.


Table 3: ESD, Positive / Negative Polarity

Position	Kind of Discharge	Remarks	Result
Accessible nonmetal Enclosure	Air discharge $\pm 8\text{kV}$	No change of function	Pass
Metal Enclosure	Contact discharge $\pm 4\text{kV}$	No change of function	Pass
Coupling plane (Both HCP and VCP)	Contact discharge $\pm 4\text{kV}$	No change of function	Pass

5.1.2 Radio Frequency Electromagnetic Field

Test Level	: 3V/m
Frequency Range	: 80-1000MHz
Modulation	: 80%AM, 1kHz
Frequency Sweep Speed	: 0.005 octave/s (1.5×1E-3 decades/s)
Performance Criteria	: A

Block Diagram of Test Set up

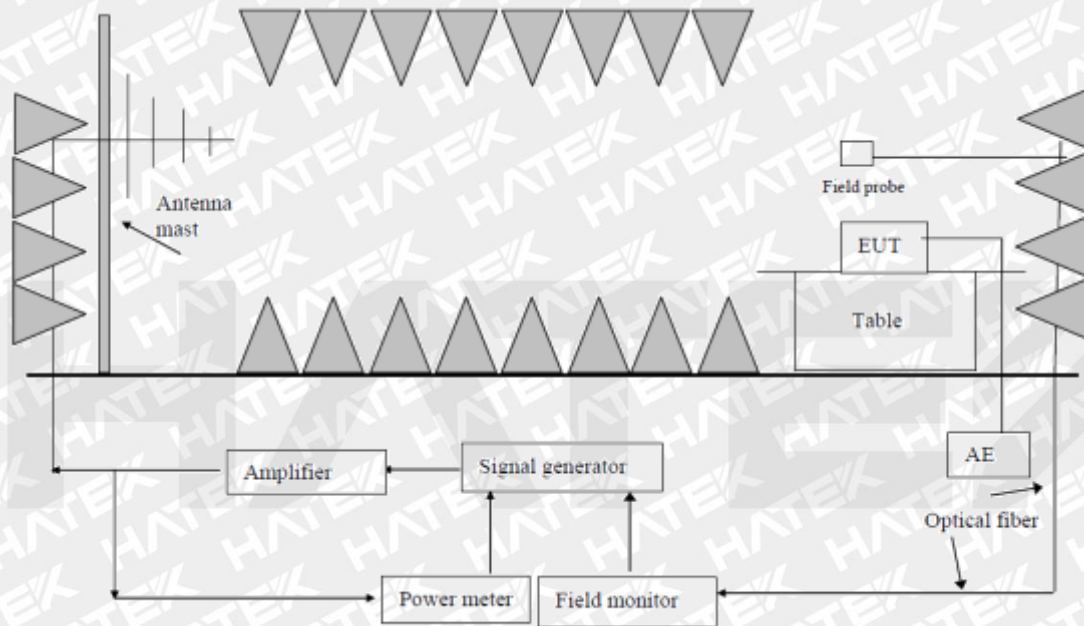

Test Procedure

The immunity against radio-frequency electromagnetic fields in the frequency range between 80MHz to 1000MHz was tested in accordance to BS IEC 61000-4-3 which is specified by Table 11 in EN IEC 55014-2:2021.

The test was performed inside a 3m modified semi-anechoic chamber. During the test the part of the ground plane between the field generating antenna and the equipment under test was covered by absorbing material. The distance between the tip of the antenna and the side of the system tested is 3m. The field uniformity of the 1.5mx1.5m plane where the surface of the EUT tested coincides with is regularly calibrated to ensure the 0-6dB field uniformity criterion as specified by BS IEC 61000-4-3 is met.

Table 4: Radiated Susceptibility, Field Strength 3V/m, Frequency 80MHz to 1000MHz


Position	Result	Remarks	Performance criterion
EUT in vertical orientation	Pass	No disturbance of function	A
EUT in horizontal orientation	Pass	No disturbance of function	A

5.2 Input and Output AC Power Ports

5.2.1 Fast Transients on AC Power Lines

Test Voltage	: $\pm 1\text{kV}$
Polarity	: negative/positive
Repetition frequency	: 5kHz
Test duration	: $\geq 120\text{sec}$
Tr/Tn	: 5ns/50ns
Performance criteria	: B

Block Diagram of Test Set up

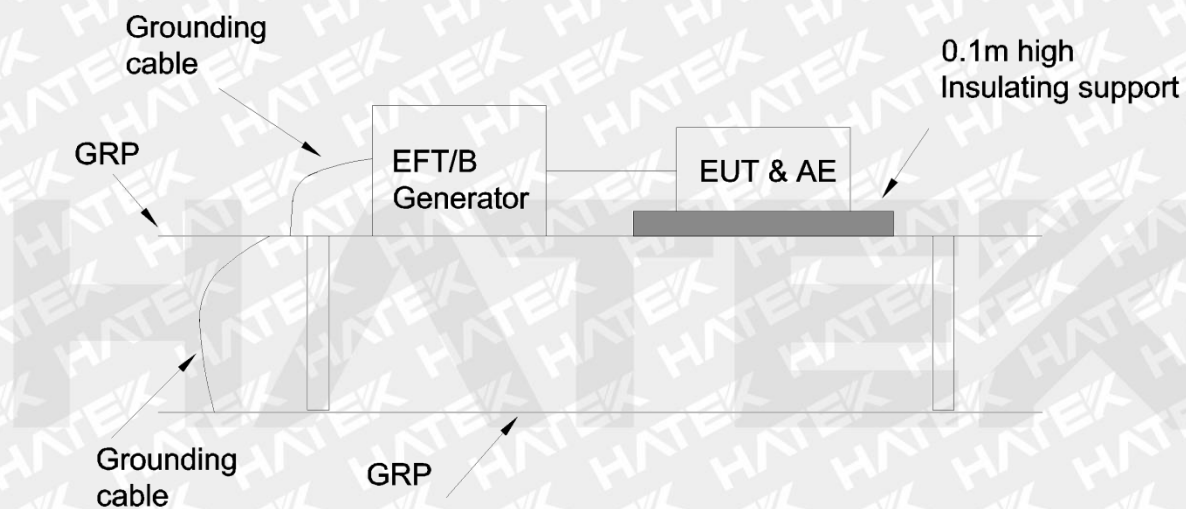

Test Procedure

The immunity against fast transients on AC power lines was tested in accordance to EN IEC 55014-2:2021. Test setup and the fast transient noise generator are according to EN 61000-4-4 which is specified by EN IEC 55014-2:2021.

The EUT is placed on 0,1m wood table above the ground plane. And the minimum distance between the EUT and all other conductive structures except the ground reference plane is more than 0,5m.

The length between the coupling device and the EUT is less than 1m. The cord length more than 1m, the excess length of the cable shall gathered into a flat coil with a 0,4m diameter, and situated at a distance of 0,1m above the ground reference plane.

The reference ground plane is an aluminium sheet of 0,25mm minimum thickness. The reference ground plane is connected to the protective earth. The size of the ground plane is 2m × 2m.


Table 5: Burst, AC Power lines, Positive and Negative Polarity

Line	Result	Remark
AC Input (L+N+PE)	$\pm 1\text{kV}$ Pass	No disturbance of function

5.2.2 Injected Current into AC Power Port

Voltage Level	: 3V(rms)(unmodulated)
Environmental phenomena	: r.f. current, common mode, 1kHz, 80%AM
Source impedance	: 150Ω
Frequency range	: 0.15-230 MHz
Sweeping rate	: $\leq 1,5 \times 10^{-3}$ decades/s
Performance criteria	: A

Block Diagram of Test Set up

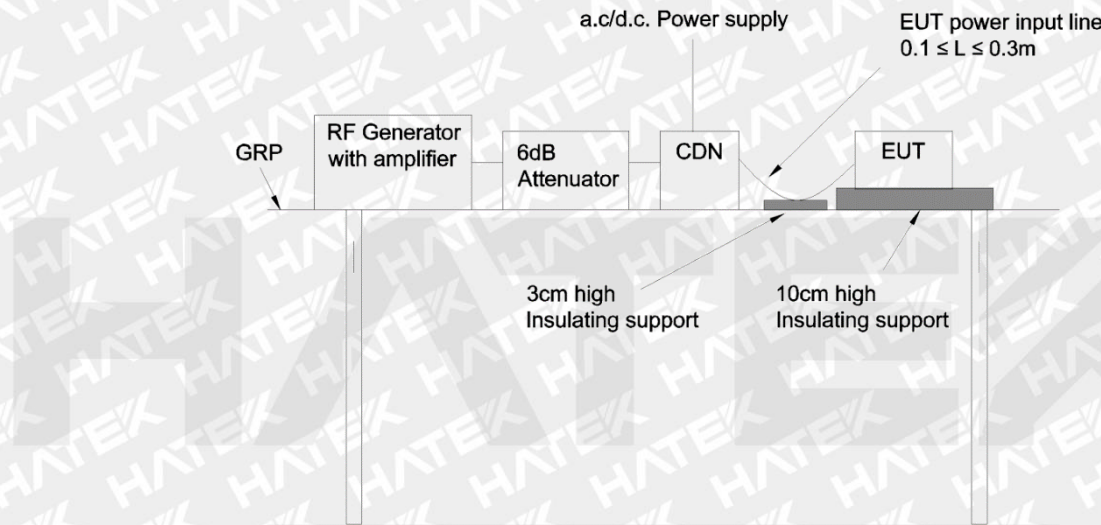

Test Procedure

The immunity against injected current into AC power port was tested according to EN IEC 55014-2:2021 in a shielded room. The Test setup and the test generator are according to EN 61000-4-6 which is specified by EN IEC 55014-2:2021.

The EUT is placed on 0,1m wood table above the ground plane. And the minimum distance between the EUT and all other conductive structures except the reference ground plane is more than 0,5m. The EUT comprised a single unit. The coupling and decoupling networks were inserted on the power supply connection. The coupling and decoupling networks was placed on the ground reference plane, making direct contact with it at about 0,1-0,3 meter from EUT. The cable between EUT and CDN is as short as possible and not bundled nor wrapped. The height of cable between the EUT and the coupling and decoupling networks above the ground reference plane was 50mm.


Table 6: Injected current, AC Power Port

Line	Coupling Method:	Remark	Result
AC Power Lines	CDN M-3	No disturbance of function	Pass

5.2.3 Surges to AC Power Port

Test Level	:	phase to neutral $\pm 1\text{kV}$ phase/neutral to PE $\pm 2\text{kV}$
Tr/Tn	:	1.2/50 μs (open-circuit voltage) 8/20 μs (short-circuit current)
Test numbers	:	5 positive and 5 negative pulses
Repetition rate	:	1 surge/min
Performance criteria	:	B

Block Diagram of Test Set up

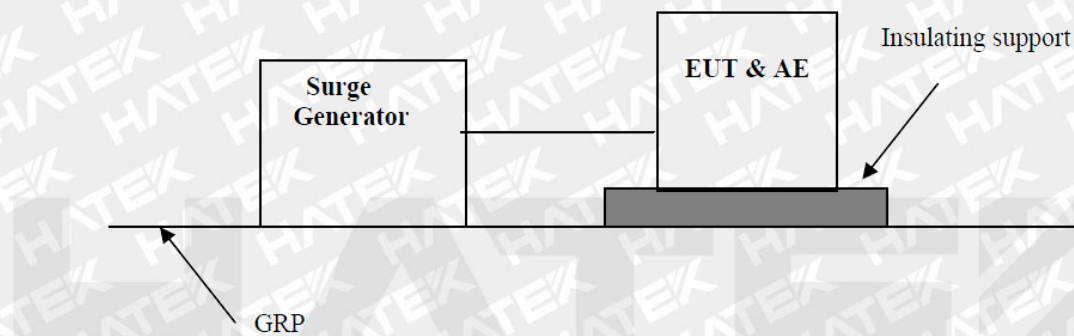

Test Procedure

The immunity against surges to AC power port was tested in accordance to EN IEC 55014-2:2021. Test setup and the Combination Wave Generator (CWG) are according to EN 61000-4-5 which is specified by EN IEC 55014-2:2021.

The EUT is placed on 0,1m wood table above the ground plane.


Table 7: Surges to AC Power lines, positive/negative

Line	Tested voltage/coupling phase	Test angle	Observation	Result
Phase to neutral	+1 kV, $+\pi/2$ (5 times) -1 kV, $-\pi/2$ (5 times)	90° 270°	No disturbance of function	Pass Pass
phase/neutral to PE	+2 kV, $+\pi/2$ (5 times) -2 kV, $-\pi/2$ (5 times)	90° 270°	No disturbance of function	Pass Pass

5.2.4 Voltage dips and interruptions to AC Power Port

Performance criteria	:	C	
Test level (in % UT) and	:	0	0.5/0.5 periods(50/60Hz)
duration (in periods of the	:	40	10/12 periods(50/60Hz)
rated frequency)	:	70	25/30 periods(50/60Hz)

Block Diagram of Test Set up

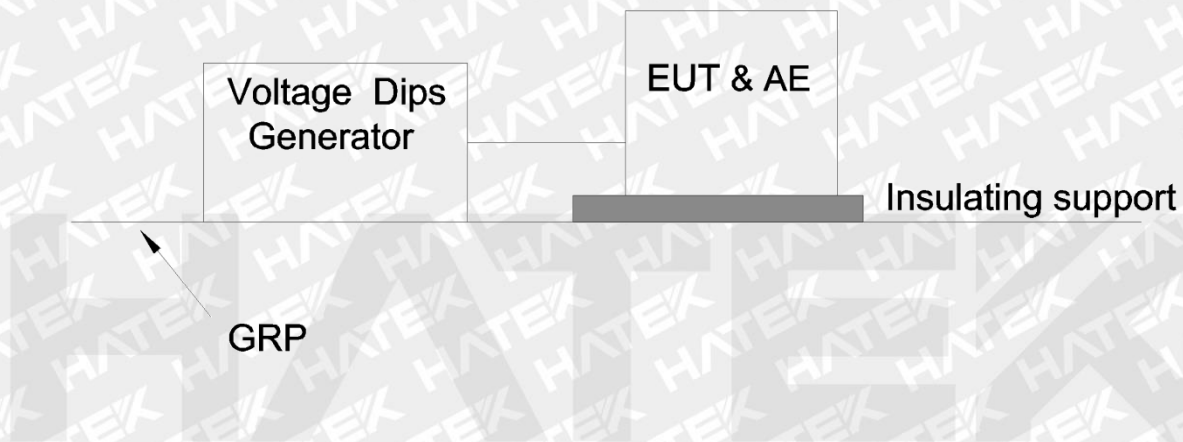

Test Procedure

The immunity against voltage dips and interruptions to AC power port was tested in accordance to EN IEC 55014-2:2021. Test setup and the test generator are according to EN 61000-4-11 which is specified by EN IEC 55014-2:2021. The EUT was placed directly on the table of aluminum.

Table 8: Test condition and Test Result for Voltage dips and Short interruptions

Test level (in % UT)	Duration	Performance criteria	Remarks	Result
0	0,5 (10ms)	C	No disturbance of function	Pass
40	10 (200ms)	C	No disturbance of function	Pass
70	25 (0.5s)	C	No disturbance of function	Pass

6 Photographs of the EUT

Photograph 1: Set-up for Disturbance Voltage



Photograph 2: Set-up for Disturbance Power



Photograph 3: Overall view of EUT (ZD-159)



Photograph 4: Overall view of EUT (ZD-159)




Photograph 5: Overall view of EUT (ZD-159)



Photograph 6: Overall view of EUT (ZD-159)




Photograph 7: Internal view of EUT (ZD-159)

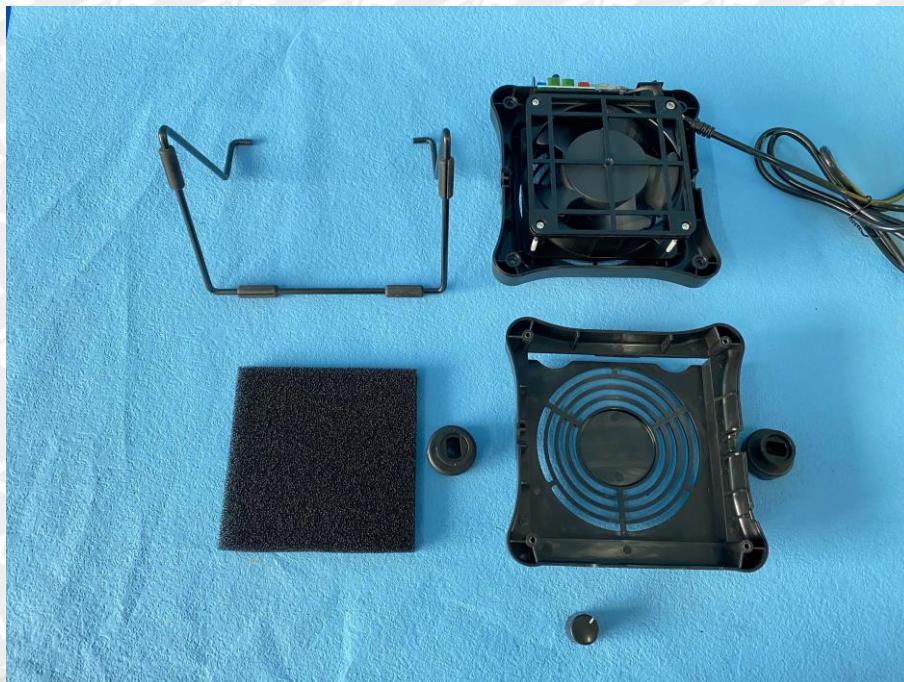


Photograph 8: Internal view of EUT (ZD-159)



Photograph 9: Internal view of EUT (ZD-159)

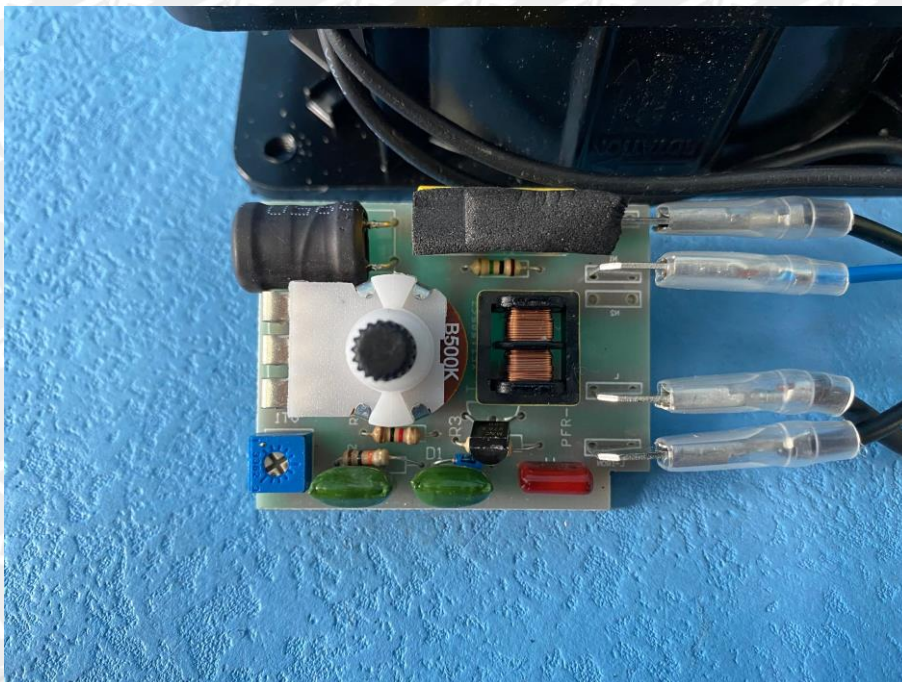

Photograph 10: Internal view of EUT (ZD-159)

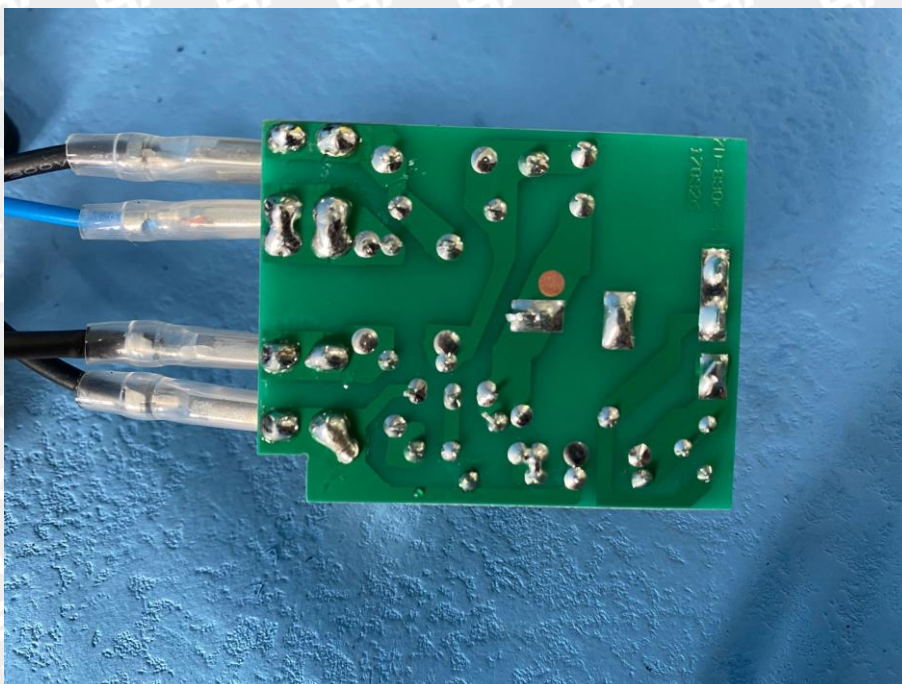

7 List of Tables

Table 1: List of Test and Measurement Equipment of Laboratory	5
Table 2: Voltage fluctuations and flicker measurement results	7
Table 3: ESD, Positive / Negative Polarity	15
Table 4: Radiated Susceptibility, Field Strength 3V/m, Frequency 80MHz to 1000MHz	16
Table 5: Burst, AC Power lines, Positive and Negative Polarity	17
Table 6: Injected current, AC Power Port	18
Table 7: Surges to AC Power lines, positive/negative	19
Table 8: Test condition and Test Result for Voltage dips and Short interruptions	20

8 List of Figures

Figure 1: Test Curve of Conducted Emission in the frequency range of 150kHz - 30MHz, L line	10
Figure 2: Test Curve of Conducted Emission in the frequency range of 150kHz - 30MHz, N line	11
Figure 3: Test Curve of Power Disturbance in the frequency range of 30-300MHz	13

9 List of Photographs

Photograph 1: Set-up for Disturbance Voltage	21
Photograph 2: Set-up for Disturbance Power	21
Photograph 3: Overall view of EUT (ZD-159)	22
Photograph 4: Overall view of EUT (ZD-159)	22
Photograph 5: Overall view of EUT (ZD-159)	23
Photograph 6: Overall view of EUT (ZD-159)	23
Photograph 7: Internal view of EUT (ZD-159)	24
Photograph 8: Internal view of EUT (ZD-159)	24
Photograph 9: Internal view of EUT (ZD-159)	25
Photograph 10: Internal view of EUT (ZD-159)	25

----- End of Test Report -----